

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 July 2003 (24.07.2003)

PCT

(10) International Publication Number  
**WO 2003/061106 A3**

(51) International Patent Classification<sup>7</sup>: H02M 3/335,  
3/156

Kitano 3-chome, Niiza-shi, Saitama 352-8666 (JP). UT-  
SUNO, Mizuki [JP/JP]; c/o Sanken Electric CO., LTD.,  
6-3, Kitano 3-chome, Niiza-shi, Saitama 352-8666 (JP).

(21) International Application Number:  
PCT/JP2003/000161

(74) Agent: KIMURA, Mitsuru; 2nd Floor, Kyohan Build-  
ing, 7, Kandanishiki-cho 2-chome, Chiyoda-ku, Tokyo  
101-0054 (JP).

(22) International Filing Date: 10 January 2003 (10.01.2003)

(25) Filing Language: English

(81) Designated States (national): CN, US.

(26) Publication Language: English

(84) Designated States (regional): European patent (AT, BE,  
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,  
IE, IT, LU, MC, NL, PT, SE, SI, SK, TR).

(30) Priority Data:  
2002-004490 11 January 2002 (11.01.2002) JP

Published:  
— with international search report

(71) Applicant (for all designated States except US): SANKEN  
ELECTRIC CO., LTD. [JP/JP]; 6-3, Kitano 3-chome, Ni-  
iza-shi, Saitama 352-8666 (JP).


(88) Date of publication of the international search report:  
15 January 2004

(72) Inventors; and

(75) Inventors/Applicants (for US only): FURUKOSHI,  
Ryuichi [JP/JP]; c/o Sanken Electric CO., LTD., 6-3,

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: POWER SOURCE APPARATUS

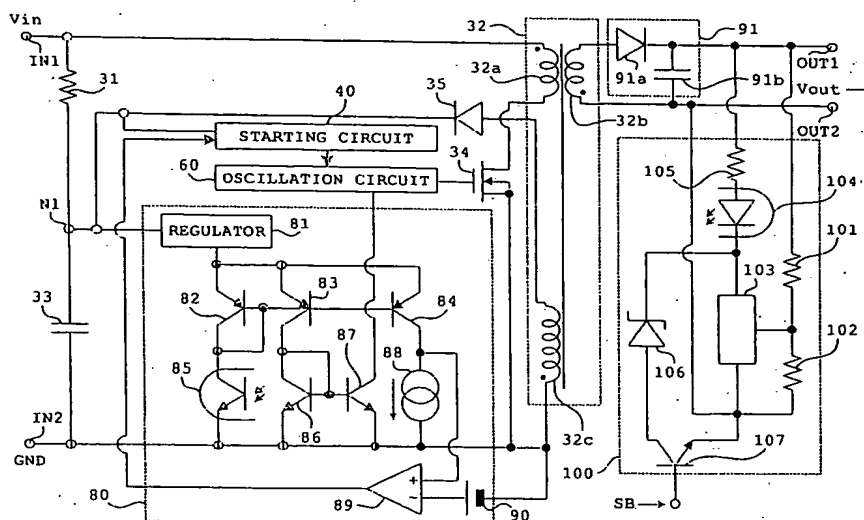

(57) Abstract: An input voltage is applied by an NMOS transistor (34) driven by an oscillation circuit (60) to a primary winding (32a) of a transformer (32) intermittently. A voltage induced in a secondary winding (32b) is rectified and smoothed by an output circuit (91) to be an output voltage. In a normal mode where no standby signal is supplied, the oscillation circuit (60) controls the NMOS transistor (34) so that the output voltage is stabilized at a predetermined first value. When a standby signal is supplied, a detection circuit (100) detects the standby signal and transmits the detection to a starting circuit (40). The starting circuit (40) starts the oscillation circuit (60) when a voltage of a capacitor (33) reaches an upper limit, and stops the oscillation circuit (60) when this voltage lowers below a lower limit. This upper limit is lower than an upper limit at which the starting circuit (40) starts the oscillation circuit (60) in the normal mode.

WO 2003/061106 A3

## DESCRIPTION

## POWER SOURCE APPARATUS

5

## Technical Field

The present invention relates to a power source apparatus, and particularly, relates to a DC-DC converter.

## Background Art

There is known a power source apparatus which performs DC-DC (direct current-direct  
10 current) conversion, and has a normal mode and a standby mode. Such a power source  
apparatus outputs a lower voltage when in the standby mode than in the normal mode.

FIG. 8 is a diagram showing an example of a conventional structure of such a power  
source apparatus. FIGS. 9 (a) to (d) are time charts for explaining the operation of the  
power source apparatus shown in FIG. 8.

15 In the normal mode, that is, when a standby signal SB is not supplied from outside, the  
base of a transistor 16 of the power source apparatus shown in FIG. 8 is set at a low level  
(hereinafter referred to as "L"). In the normal mode, when an input voltage  $V_{in}$  is applied  
between input terminals IN1 and IN2, a capacitor 3 is charged via a starting resistor 1. The  
speed at which the capacitor 3 is charged depends upon a time constant which is determined  
20 by the resistance value of the starting resistor 1 and the capacitance of the capacitor 3.

When charging of the capacitor 3 goes on, and as shown in FIG. 9(a), the voltage of a  
connection point (node N1) of the capacitor 3 and the starting resistor 1 reaches  $V_{cc_{on}}$ , a  
starting circuit 6 supplies electricity stored in the capacitor 3 to an oscillation circuit 7 (FIG.  
9(b)). When supplied with electricity, the oscillation circuit 7 drives the gate of an NMOS  
25 4 by voltage, to turn on/off the NMOS 4.

The NMOS 4 flows a current through a primary winding 2a of a transformer 2 when it  
is turned on, and cuts off the current flowing through the primary winding 2a when it is

turned off. As a result, an AC (alternating current) voltage is caused in a secondary winding 2b of the transformer 2. A diode 9 rectifies the voltage caused in the secondary winding 2b of the transformer 2. A capacitor 10 smoothes the rectified voltage, and generates a DC output voltage  $V_{out}$  to be supplied to a load.

5        Resistors 11 and 12 generate a voltage proportional to the DC output voltage  $V_{out}$  at the connection point of them. An error amplifier 13 flows a current corresponding to voltage obtained by amplifying a difference between this voltage and a predetermined reference voltage through a resistor 15 and a light emitting element 14. As a result, the light emitting element 14 emits light. When the light emitting element 14 emits light, a  
10        current representing the value of the DC output voltage  $V_{out}$  flows through a light receiving element 8.

The oscillation circuit 7 determines timings (specifically, frequencies or duty ratio, for example) at which the NMOS 4 is turned on and off in accordance with the amount of the current flowing through the light receiving element 8, and turns on and off the NMOS 4 at  
15        the determined timings. By this operation, the oscillation circuit 7 controls the DC output voltage  $V_{out}$  to be a constant value  $V_{out1}$  shown in FIG. 9(c).

The voltage of the node N1 lowers by turning on the NMOS 4. On the other hand, a voltage  $V_{cc\_off}$  is preset as a minimum value to be reached by the voltage of the node N1 as a result of the starting circuit 6's supplying electricity to the oscillation circuit 7. When the  
20        voltage of the node N1 lowers below  $V_{cc\_off}$ , the oscillation circuit does not operate.

Therefore, in the normal mode, the voltage of the node N1, i.e., the voltage to be supplied to the starting circuit 6 does not lower below the voltage  $V_{cc\_off}$ . In the normal mode, since the voltage of the node N1 exceeds  $V_{cc\_off}$ , the oscillation circuit 7 does not stop, and the DC output voltage  $V_{out}$  is controlled to be stabilized at a desired value. The voltages  $V_{cc\_on}$  and  
25         $V_{cc\_off}$  are set so that the difference between them may be sufficiently large, in order to control the power source apparatus shown in FIG. 8 to operate stably.

A tertiary winding 2c of the transformer 2 causes an inductive voltage when a voltage

is applied to the primary winding 2a intermittently. As a result of this inductive voltage being caused, a current flows through the node N1 via a diode 5, and the capacitor 3 is charged.

As shown in FIG. 9(d), when a standby signal SB of a high level (hereinafter referred to as "H") is supplied to the base of the transistor 16, the power source apparatus shown in FIG. 8 becomes the standby mode. In the standby mode, the transistor 16 is turned on. When the transistor 16 is turned on, a Zener diode 17 reaches breakdown, and the voltage of an output terminal of the error amplifier 13 becomes a voltage almost equal to the breakdown voltage of the Zener diode 17. The light emitting element 14 emits light having an intensity representing the breakdown voltage. The light receiving element 8 receives light from the light emitting element 14, and flows a current having an intensity corresponding to the intensity of the received light. When the oscillation circuit 7 detects the current flowed by the light receiving element 8, it turns off the NMOS 4 so that a time period during which the NMOS 4 stays on in a unit time period becomes shorter than in the normal mode, for example. As a result, the amount of the current flowing through the primary winding 2a becomes smaller, and the DC output voltage  $V_{out}$  lowers.

In the standby mode, the amount of the current to flow from the tertiary winding 2c to the capacitor 3 also becomes smaller. Therefore, while the NMOS 4 is turned on and off repeatedly, the voltage of the node N1 lowers below  $V_{cc_{off}}$ , power supply to the oscillation circuit 7 is stopped, and the oscillation circuit 7 stops operating. Afterwards, when the starting resistor 1 charges the capacitor 3 and the voltage of the node N1 reaches  $V_{cc_{on}}$  again, the starting circuit 6 resumes power supply to the oscillation circuit 7, and the oscillation circuit 7 resumes turning on/off the NMOS 4.

As explained above, according to the power source apparatus shown in FIG. 8, in the standby mode, the DC output voltage  $V_{out}$  lowers below the value at which it is stabilized in the normal mode. As a result, the voltage of the node N1 lowers below  $V_{cc_{off}}$ , and the oscillation circuit 7 operates intermittently. Thus, power consumption can be reduced.

However, according to the conventional power source apparatus shown in FIG. 8, in the standby mode, a time period required for the voltage of the node N1 to once lower to  $V_{cc_{off}}$  and to rise again to  $V_{cc_{on}}$  is long. Therefore, in the standby mode, the range of fluctuation of the DC output voltage  $V_{out}$  to be supplied to the load is large.

5

### Disclosure of Invention

The object of the present invention is to provide a power source apparatus which supplies a less fluctuant DC voltage to a load, even in a standby mode.

To achieve the above object, a power source apparatus comprises: a conversion circuit 10 (40, 60, 34, 32, 91, 100, 80) which performs conversion of an input voltage into an output voltage different from the input voltage; and a driving power source (33) which is charged with the input voltage to drive the conversion circuit (40, 60, 34, 32, 91, 100, 80), wherein:

in a case where a standby signal is not supplied from outside, the conversion circuit (40, 60, 34, 32, 91, 100, 80) performs the conversion so that the output voltage may be stabilized 15 at a predetermined first value;

in a case where the standby signal is supplied from outside, the conversion circuit (40, 60, 34, 32, 91, 100, 80) performs the conversion so that the output voltage may be stabilized at equal to or lower than a predetermined second value which is lower than the predetermined first value, by controlling the output voltage to rise when a voltage of the 20 driving power source (33) rises to a first charging voltage, and by controlling the output voltage to lower when the voltage of the driving power source (33) lowers to a second charging voltage; and

a difference between the first and second charging voltages in the case where the standby signal is supplied is smaller than a difference between the first and second charging 25 voltages in a case where the standby signal is not supplied.

According to this power source apparatus, the cycle by which the conversion circuit operates intermittently in a state where a standby signal is supplied is short, and fluctuation

of the output voltage can be reduced.

The conversion circuit (40, 60, 34, 32, 91, 100, 80) may include:

a transformer (32a, 32b) which has a primary winding and a secondary winding which are inductively coupled to each other;

5 a switching circuit (40, 60, 34, 80) which applies the input voltage to the primary winding intermittently;

a rectifier circuit (91) which rectifies a voltage which is induced in the secondary winding; and

a detection circuit (100) which detects that the standby signal is supplied.

10 In this case, the switching circuit (40, 60, 34, 80) may determine whether or not the detection circuit (100) detects the standby signal.

In a case where determining that the standby signal is not detected, the switching circuit (40, 60, 34, 80) may set timings of intermittence of the input voltage so that the output voltage may be stabilized at the predetermined first value.

15 And in a case where determining that the standby signal is detected, the switching circuit (40, 60, 34, 80) may stabilize the output voltage at equal to or lower than the predetermined second value, by starting applying the input voltage intermittently when the voltage of the driving power source (33) rises to the first charging voltage, and by stopping applying the input voltage when the voltage of the driving power source (33) lowers to the  
20 second charging voltage.

In this case, the power source apparatus may further comprise: a tertiary winding (32c) which is inductively coupled to the primary winding; and an auxiliary rectifier circuit (35) which rectifies a voltage induced in the tertiary winding (32c), and the driving power source (33) may also be charged with a voltage obtained by rectification by the auxiliary rectifier  
25 circuit (35).

The conversion circuit (40, 60, 34, 32, 91, 100, 80) may include:

a coil (111);

a switching circuit (40, 60, 34, 80) which applies the input voltage to the coil (111) intermittently;

a rectifier circuit (91) which rectifies a voltage induced in the coil (111); and

a detection circuit (100) which detects that the standby signal is supplied.

5 In this case, the switching circuit (40, 60, 34, 80) may determine whether or not the detection circuit (100) detects the standby signal.

In a case where determining that the standby signal is not detected, the switching circuit (40, 60, 34, 80) may set timings of intermittence of the input voltage so that the output voltage may be stabilized at the predetermined first value.

10 And in a case where determining that the standby signal is detected, the switching circuit (40, 60, 34, 80) may stabilize the output voltage at equal to or lower than the predetermined second value, by starting applying the input voltage intermittently when the voltage of the driving power source (33) rises to the first charging voltage, and by stopping applying the input voltage when the voltage of the driving power source (33) lowers to the  
15 second charging voltage.

The power source apparatus may further comprise: an auxiliary coil (112) which is inductively coupled to the coil (111); and an auxiliary rectifier circuit (113) which rectifies a voltage induced in the auxiliary coil (112), and the driving power source (33) may also be charged with a voltage obtained by rectification by the auxiliary rectifier circuit (113).

20 The conversion circuit (40, 60, 34, 32, 91, 100, 80) may further include a feedback circuit (104, 105) which generates a feedback signal representing the output voltage.

In this case, the switching circuit (40, 60, 34, 80) may set timings of intermittence of the input voltage so that the output voltage may be stabilized at the predetermined first value, based on the feedback signal, in a case where it determines that the detection circuit (100)  
25 does not detect the standby signal.

The detection circuit (100) may control the feedback circuit (104, 105) so that a value represented by the feedback signal may be a predetermined value, in response to that the

standby signal is supplied.

In this case, the switching circuit (40, 60, 34, 80) may determine whether or not the detection circuit (100) detects the standby signal, based on the value represented by the feedback signal.

5 In a case where the detection circuit (100) detects that the standby signal is supplied, said switching circuit (40, 60, 34, 80) may set timings of intermittence of the input voltage based on the value represented by the feedback signal so that the output voltage may be stabilized at equal to or lower than the predetermined second value, by starting intermittent application of the input voltage when the voltage of said driving power source (33) rises to  
10 the first charging voltage, and by stopping the application of the input voltage when the voltage of said driving power source (33) lowers to the second charging voltage.

The second charging voltage in the case where the standby signal is supplied and the second charging voltage in the case where the standby signal is not supplied may be substantially equal to each other.

15

#### Brief Description of Drawings

These objects and other objects and advantages of the present invention will become more apparent upon reading of the following detailed description and the accompanying drawings in which:

20 FIG. 1 is a diagram showing a structure of a direct current power source apparatus according to a first embodiment of the present invention;

FIG. 2 is a diagram showing an example of a structure of a starting circuit shown in FIG. 1;

FIG. 3 is a diagram showing an example of a structure of an oscillation circuit shown in  
25 FIG. 1;

FIGS. 4 (a) to (c) are waveform charts for explaining an operation of the starting circuit shown in FIG. 2;



FIGS. 5 (a) to (g) are waveform charts for explaining an operation of the oscillation circuit shown in FIG. 3;

FIGS. 6 (a) to (d) are waveform charts showing changes of a direct current output voltage;

5 FIG. 7 is a diagram showing a structure of a direct current power source apparatus according to a second embodiment of the present invention;

FIG. 8 is a diagram showing an example of a structure of a conventional direct current power source apparatus; and

FIGS. 9 (a) to (d) are time charts showing an operation of FIG. 8.

10

## Best mode for Carrying Out the Invention

### First Embodiment

FIG. 1 is a diagram showing the structure of a direct current (DC) power source apparatus according to a first embodiment of the present invention. This DC power source  
15 apparatus is one that can be switched between a normal mode and a standby mode. This DC power source apparatus comprises a starting resistor 31, a transformer 32, a capacitor 33, a starting circuit 40, an oscillation circuit 60, a determination circuit 80, an output circuit 91, and a detection circuit 100.

One end of the starting resistor 31 and one end of a primary winding 32a included in  
20 the transformer 32 are connected to an input terminal IN1 of this DC power source apparatus. The other end of the starting resistor 31 is connected to one electrode of the capacitor 33. The other electrode of the capacitor 33 is connected to an input terminal IN2. The input terminal IN1 and the input terminal IN2 are connected to a power source (not shown). This power source supplies a ground voltage GND to the input terminal IN2, and supplies a  
25 power source voltage to the input terminal IN1. The starting resistor 31 provides the capacitor 33 with a charging current supplied from this power source.

The transformer 32 includes the primary winding 32a, a secondary winding 32b, and a

tertiary winding 32c which are inductively coupled to one another. The other end of the primary winding 32a is connected to the drain of an N-channel MOS (Metal-Oxide-Silicon) type field effect transistor (hereinafter, referred to as NMOS) 34. The source of the NMOS 34 is connected to the input terminal IN2. One end of the tertiary winding 32c is connected  
5 to a connection point (node N1) of the capacitor 33 and the starting resistor 31 via a diode 35. The other end of the tertiary winding 32c is connected to the input terminal IN2. The tertiary winding 32c serves as an auxiliary coil which generates an electric current, and the diode 35 rectifies the electric current generated by the tertiary winding 32c and charges the capacitor 33 with this rectified current.

10 The starting circuit 40 is connected to the node N1, the oscillation circuit 60 is connected to the starting circuit 40, and a gate of the NMOS 34 is connected to the oscillation circuit 60. The oscillation circuit 60 starts operating when supplied with electricity, and controls the level of a DC output voltage by switching on or off the NMOS 34. The starting circuit 40 is a circuit which supplies electricity to the oscillation circuit 60.  
15 The determination circuit 80 is further connected to the node N1. The determination circuit 80 is a circuit which determines whether or not a later-described feedback signal FB indicates that a later-described standby signal SB has been supplied, and transmits the determination result to the starting circuit 40.

FIG. 2 is a diagram showing an example of the structure of the starting circuit 40  
20 shown in FIG. 1. The starting circuit 40 shown in FIG. 2 comprises three comparators 41, 42, and 43, three power sources 44, 45, and 46, an AND gate 47, an OR gate 48, a reset-set flip-flop (hereinafter referred to as RS-FF) 49, a resistor 50, an NPN type transistor 51, and diodes 52 and 53.

A noninverting input terminal (+) of the comparator 41 is connected to the node N1,  
25 and an inverting input terminal (-) of the comparator 41 is connected to the power source 44 which generates a reference voltage  $V_{cc_{on1}}$ . The comparator 41 outputs a high level voltage (hereinafter referred to as "H") when the voltage of the node N1 is equal to or higher than

the reference voltage  $V_{cc_{on1}}$ , and outputs a low level voltage (hereinafter referred to as "L") when the voltage of the node N1 is lower than the reference voltage  $V_{cc_{on1}}$ .

A noninverting input terminal (+) of the comparator 42 is connected to the power source 45 which generates a reference voltage  $V_{cc_{off}}$ , and an inverting input terminal (-) of the comparator 42 is connected to the connection terminal N1. The comparator 42 outputs "H" when the voltage of the node N1 is equal to or lower than the reference voltage  $V_{cc_{off}}$ , and outputs "L" when the voltage of the node N1 is over the reference voltage  $V_{cc_{off}}$ .

A noninverting input terminal (+) of the comparator 43 is connected to the node N1, and an inverting input terminal (-) of the comparator 43 is connected to the power source 46 which generates a reference voltage  $V_{cc_{on2}}$ . The comparator 43 outputs "H" when the voltage of the node N1 is equal to or higher than the reference voltage  $V_{cc_{on2}}$ , and outputs "L" when the voltage of the node N1 is lower than the reference voltage  $V_{cc_{on2}}$ . The reference voltage  $V_{cc_{on2}}$  is a voltage higher than the reference voltage  $V_{cc_{off}}$  and lower than the reference voltage  $V_{cc_{on1}}$ .

15 An output terminal of the comparator 43 is connected to one input terminal of the two-input AND gate 47. The other input terminal of the AND gate 47 is supplied with a determination result from the determination circuit 80. An output terminal of the comparator 41 is connected to one input terminal of the two-input OR gate 48, and an output terminal of the AND gate 47 is connected to the other input terminal of the OR gate 48.

20 An output terminal of the OR gate 48 is connected to a set terminal (S) of the RS-FF 49. An output terminal of the comparator 42 is connected to a reset terminal (R) of the RS-FF 49.

Further, one end of the resistor 50 and a collector of the NPN type transistor 51 are connected to the node N1. The other end of the resistor 50 is connected to a base of the transistor 51, a cathode of the Zener diode 52, and an anode of the diode 53.

An anode of the Zener diode 52 is grounded, and a cathode of the diode 53 is connected to an output terminal (Q) of the RS-FF 49. An emitter of the transistor 51

constitutes an output terminal of the starting circuit 40. When the RS-FF 49 outputs "H", the emitter of the transistor 51 supplies electricity to the oscillation circuit 60, and when the RS-FF 49 outputs "L", it stops supplying electricity to the oscillation circuit 60.

FIG. 3 is a diagram showing an example of the structure of the oscillation circuit 60 shown in FIG. 1. The oscillation circuit 60 shown in FIG. 3 comprises a constant current source 61 whose input terminal is connected to the output terminal of the starting circuit 40, a resistor 62 whose one end is connected to the output terminal of the starting circuit 40, two PNP type transistors 63 and 64 whose emitters are connected to the output terminal of the starting circuit 40, capacitors 65 and 69, a diode 66, resistors 67 and 70, an NPN type transistor 68, comparators 71 and 72, and a RS-FF 73.

An output terminal of the constant current source 61 is connected to one electrode of the capacitor 65, and the other electrode of the capacitor 65 is connected to the ground GND. An anode of the diode 66 is connected to a connection point (node N2) of the one electrode of the capacitor 65 and the constant current source 61, and a cathode of the diode 66 is connected to a base of the NPN type transistor 68 via the resistor 67. A collector of the transistor 68 is connected to a collector of the transistor 63 and to one electrode of the capacitor 69. An emitter of the transistor 68 and the other electrode of the capacitor 69 are connected to the ground GND.

One end of the resistor 70 is connected to the other end of the resistor 62, and the other end of the resistor 70 is connected to the ground GND. A connection point (node N3) of the collector 63, the collector of the transistor 68, and the one electrode of the capacitor 69 is connected to a noninverting input terminal (+) of the comparator 71. A connection point (node N4) of the resistor 62 and the resistor 70 is connected to inverting input terminals (-) of the comparators 71 and 72. A noninverting input terminal (+) of the comparator 72 is connected to the node N2. A voltage V1 generated by the resistors 62 and 70 is input to the inverting input terminals (-) of the comparators 71 and 72.

An output terminal of the comparator 71 is connected to a set terminal (S) of the RS-FF

73, and an output terminal of the comparator 72 is connected to the reset terminal (R) of the RS-FF 73.

A positive phase output terminal (Q) of the RS-FF 73 is connected to the cathode of the diode 66. A negative phase output terminal ( $\bar{Q}$ ) of the RS-FF 73 is connected to a gate of the NMOS 34. A base of the transistor 63 is connected to a base and collector of the transistor 64. The collector of the transistor 64 is connected to the determination circuit 80.

As shown in FIG. 1, the determination circuit 80 comprises a regulator 81 whose input terminal is connected to the node N1, three PNP type transistors 82, 83, and 84, a light receiving element 85 constituted by a photo transistor or the like, NPN type transistors 86 and 87, a constant current source 88, a comparator 89, and a power source 90.

Emitters of the three PNP type transistors 82, 83, and 84 are connected to an output terminal of the regulator 81. A collector of the transistor 82 is connected to bases of the transistors 82 to 84, and is also connected to one end of the light receiving element 85. The other end of the light receiving element 85 is connected to the input terminal IN2.

A collector of the transistor 83 is connected to a collector and base of the NPN type transistor 86, and to a base of the NPN type transistor 87. Emitters of the transistors 86 and 87 are connected to the input terminal IN2. A collector of the transistor 87 is connected to the collector of the transistor 64 in the oscillation circuit 60. A collector of the transistor 84 is connected to an input terminal of the constant current source 88, and an output terminal of the constant current source 88 is connected to the input terminal IN2.

A connection point of the collector of the transistor 84 and the constant current source 88 is connected to a noninverting input terminal (+) of the comparator 89. An inverting input terminal (-) of the comparator 89 is connected to the power source 90 which generates a reference voltage by which which of the standby mode and the normal mode is set is determined. An output terminal of the comparator 89 is connected to the other input terminal of the AND gate 47 in the starting circuit 40.

The output circuit 91 and the detection circuit 100 are connected to the secondary

winding 32b of the transformer 32.

The output circuit 91 is constituted by a rectified-current smoothing circuit comprising a diode 91a and a capacitor 91b. An anode of the diode 91a is connected to one end of the secondary winding 32b, and a cathode of the diode 91a is connected to an output terminal 5 OUT1, and to one electrode of the capacitor 91b. The other electrode of the capacitor 91b is connected to the other end of the secondary winding 32b, and to an output terminal OUT2. The output terminals OUT1, and OUT2 output a DC output voltage  $V_{out}$  generated by the output circuit 91 to a load (not shown).

The detection circuit 100 comprises resistors 101 and 102 which are serially connected 10 between the output terminal OUT1 and the output terminal OUT2, an error amplifier 103, a light emitting element 104 constituted by a light emitting diode, etc., a resistor 105, a Zener diode 106, and an NPN type transistor 107.

A connection point of the resistor 101 and the resistor 102 is connected to an input terminal of the error amplifier 103. The error amplifier 103 amplifies a difference between 15 a reference voltage (not shown) and a voltage generated by the resistors 101 and 102,. One end of the light emitting element 104 is connected to an output terminal of the error amplifier 103. The light emitting element 104 constitutes a photo coupler together with the light receiving element 85. The resistor 105 is connected between the other end of the light emitting element 104 and the output terminal OUT1.

20 Further, a cathode of the Zener diode 106 is connected to the output terminal of the error amplifier 103, and an anode of the Zener diode 106 is connected to a collector of the NPN type transistor 107. An emitter of the transistor 107 is connected to the output terminal OUT2. A standby signal SB is input to a base of the transistor 107.

Next, an operation of the DC power source apparatus of FIG. 1 will be explained with 25 reference to FIGS. 4 (a) to (c), and FIGS. 5 (a) to (g). FIGS. 4 (a) to (c) are waveform charts for explaining an operation of the starting circuit 40 shown in FIG. 2. FIGS. 5 (a) to (g) are waveform charts for explaining an operation of the oscillation circuit 60 shown in

FIG. 3.

In the normal mode, i.e., in a state where a standby signal SB is not supplied, the base of the transistor 107 is at "L". In this normal mode when an input voltage  $V_{in}$  is applied to the input terminal IN1, the capacitor 33 is charged with electricity via the starting resistor 31.

5 The speed at which the capacitor 33 is charged depends upon the product of the resistance value of the starting resistor 31 and the capacitance of the capacitor 33, i.e., depends upon a time constant.

When charging of the capacitor 33 goes on, and the voltage of the connection point (node N1) of the capacitor 33 and the starting resistor 31 becomes higher and finally reaches

10  $V_{cc_{on1}}$  as shown in FIG. 4(a), the comparator 41 of the starting circuit 40 determines that the voltage of the node N1 reaches the reference voltage  $V_{cc_{on1}}$  supplied from the power source 44 by comparing it with  $V_{cc_{on1}}$ , and outputs "H". Due to this, an output signal of the OR gate 48 is switched to "H", and the RS-FF 49 is set. When set, the RS-FF 49 outputs "H" from the output terminal Q.

15 When the RS-FF 49 outputs "H", the base of the transistor 51 is driven to be "H", thereby the transistor 51 is switched on. When switched on, the transistor 51 outputs a voltage  $V_{reg}$  which is almost equal to a Zener voltage of the Zener diode 52 from its emitter as shown in FIG. 4(b) and supplies it to the oscillation circuit 60. As a result, power supply to the oscillation circuit 60 is started.

20 When the voltage  $V_{reg}$  is applied to the oscillation circuit 60 (see FIG. 5(a)), and thereby electricity is supplied thereto, the RS-FF 73 is initialized into the reset state. When reset, the RS-FF 73 outputs "L" from the positive phase output terminal (Q), and outputs "H" from the negative phase output terminal ( $\bar{Q}$ ). When the negative phase output terminal ( $\bar{Q}$ ) outputs "H", the gate of the NMOS 34 is driven to be "H", thereby the NMOS

25 34 is switched on. The capacitor 65 discharges via the diode 66, and the voltage of the node N2 becomes almost zero.

In the meantime, the resistors 62 and 70 divide the voltage input from the transistor 51,

and generate a voltage  $V_1$ . Then, when a current  $I_1$  which corresponds to a later-described feedback signal FB flows through the transistor 64 (see FIG. 5(b)), a current having almost the same intensity as that of the current  $I_1$  flows through the transistor 63, and charges the capacitor 69. When the capacitor 69 is charged and the voltage of the connection point 5 (node N3) of the transistor 63 and the capacitor 69 reaches  $V_1$  as shown in FIG. 5(c), the comparator 71 detects that the voltage of the node N3 reaches  $V_1$ , and outputs "H" as shown in FIG. 5 (e). As a result, the RS-FF 73 is set.

When set, the RS-FF 73 outputs "H" from the positive phase output terminal (Q), and outputs "L" from the negative phase output terminal ( $\bar{Q}$ ) as shown in FIG. 5(g). Due to 10 this, the NMOS 34 is switched off. Further, the transistor 68 is turned on, the capacitor 69 discharges, and the voltage of the node N3 becomes almost zero.

Afterwards, the constant current source 61 charges the capacitor 65. When the capacitor 65 is charged and the voltage of the connection point (node N2) of the capacitor 65 and the constant current source 61 reaches the voltage  $V_1$  as shown in FIG. 5 (d), the 15 comparator 72 detects that the voltage of the node N2 reaches the voltage  $V_1$ , and outputs "H" as shown in FIG. 5(f). As a result, the RS-RR 73 is reset. When the RS-FF 73 is reset, the NMOS 34 is turned on again. Thereafter, the same operation is repeated, and the NMOS 34 is turned on and off repeatedly.

When the current flowing through the transistor 64 changes, for example, the intensity 20 of the current increases, the time required for charging the capacitor 69 is shortened, and the NMOS 34 is switched off earlier. By this control, the DC output voltage  $V_{out}$  is kept at a constant value.

The NMOS 34 flows a current through the primary winding 32a of the transformer 32 when it is turned on, and cuts the current flowing through the primary winding 32a when it is 25 turned off. As a result, a voltage is generated in the secondary winding 32b and the tertiary winding 32c. The diode 91a which is connected to the secondary winding 32b rectifies the voltage supplied from the secondary winding 32b, and the capacitor 91b smoothes the



rectified voltage and generates the DC output voltage  $V_{out}$  to be supplied to the load. The diode 35 which is connected to the tertiary winding 32c rectifies the voltage supplied from the tertiary winding 32c, and the capacitor 33 is charged with the rectified voltage.

The resistors 101 and 102 generate a voltage which is proportional to the DC output voltage  $V_{out}$  to the connection point of them. The error amplifier 103 flows a current having an intensity substantially proportional to a difference between the voltage generated by the resistors 101 and 102 and the reference voltage (not shown) through the resistor 105 and the light emitting element 104. As a result, the light emitting element 104 emits light. When the light emitting element 104 emits light, the light receiving element 85 receives this light, and flows a current having an intensity determined by the value of the DC output voltage  $V_{out}$ , i.e., the feedback signal FB.

As a result, a current having an intensity proportional to the feedback signal FB flows through the transistors 83 and 86. Then, the current  $I_1$  having an intensity proportional to the feedback signal FB flows through the transistor 87 and the transistor 64 in the oscillation circuit 60.

When a standby signal SB which is at "H" is input to the base of the transistor 107, the DC power source apparatus changes to a standby mode.

For example, when a standby signal SB is input at a time  $t_1$  shown in FIGS. 4 and 5, the transistor 107 is turned on. When the transistor 107 is turned on, the Zener diode 106 reaches breakdown, and the voltage of the output terminal of the error amplifier 103 becomes almost equal to the breakdown voltage of the Zener diode 106. Due to this, the intensity of a current flowing through the light emitting element 104 is locked, and the light emitting element 104 emits light having an intensity corresponding to the intensity of the current. The light receiving element 85 receives the light emitted by the light emitting element 104, and flows a feedback signal FB representing the intensity of the received light through the transistor 82. This feedback signal FB has an intensity indicating that a standby signal SB has been input.

In the standby mode, a current having an intensity proportional to the intensity of the feedback signal FB indicating that a standby signal SB has been input flows through the transistor 63 of the oscillation circuit 60, and charges the capacitor 69. And a current having an intensity proportional to the intensity of this feedback signal FB flows through the transistor 84. As a result, the voltage of the noninverting input terminal (+) of the comparator 89 rises, and the comparator 89 outputs "H" as a signal and supplies it to the AND gate 47 of the starting circuit 40. This signal output from the comparator 89 is a determination signal representing that the standby mode is set (see FIG. 4(c)).

If the DC power source apparatus is set to the standby mode at the time t1, the amount of the current I1 flowing through the transistor 64 becomes larger after the time t1 than when the DC power source apparatus is set to the normal mode where no standby signal SB is input. Therefore, as shown in FIG. 5(c), the speed at which the capacitor 69 is charged becomes higher, and thus the speed at which the voltage of the node N3 rises becomes higher, the timing at which the RS-FF 73 is set comes earlier, and the period of time during which the NMOS 34 is on becomes shorter. As a result, the amount of a charging current to be supplied to the capacitor 33 from the tertiary winding 32c is reduced, and the charging voltage of the capacitor 33 which supplies electricity to the oscillation circuit 60 via the transistor 51 falls. Accordingly, the voltage of the node N1 falls gradually, as shown in FIG. 4 (a).

When the voltage of the node N1 falls and further falls below the voltage  $V_{cc\_off}$  generated by the power source 45, the comparator 42 outputs "H" and the RS-FF 49 is reset. When reset, the RS-FF 49 outputs "L" from the output terminal (Q), and turns off the transistor 51. As a result, power supply to the oscillation circuit 60 is stopped as shown in FIG. 4(b). While the power supply is stopped, the oscillation circuit 60 does not turn on or off the NMOS 34.

Since the capacitor 33 is supplied with a charging current from an external power source via the starting resistor 31 even while electricity is not supplied to the oscillation

circuit 60, it is charged.

In the standby mode, the comparator 39 outputs "H", and this "H" is supplied to the other input terminal of the AND gate 47. When the capacitor 33 is charged via the starting resistor 31 and the voltage of the node N1 reaches the voltage  $V_{cc_{on2}}$  corresponding to the voltage of the power source 46, the comparator 43 outputs "H". When the comparator 43 outputs "H", the output terminal of the AND gate 47 is switched to "H", and an output signal from the OR gate 48 becomes "H".

When the output signal from the OR gate 48 becomes "H", the RS-FF 49 is set and the transistor 51 is turned on. When the transistor 51 is turned on, electricity is supplied to the oscillation circuit 60 again, and the NMOS 34 is turned on and off by the oscillation circuit 60. During the period of time in which the standby signal SB is input, the above described operation is repeated, and the DC output voltage  $V_{out}$  to be supplied to the load becomes lower than that of the normal mode.

Next, effects of the DC power source apparatus according to the present embodiment will be explained. FIGS. 6 (a) to (d) are waveform charts showing changes of the DC output voltage.

In the normal mode, the voltage of the node N1 does not become equal to or lower than  $V_{cc_{off}}$ , and the DC output voltage  $V_{out}$  is controlled to be the voltage  $V_{out1}$ , and thus becomes constant.

Contrarily, when the standby signal SB which is at "H" is input as shown in FIG. 6(c), the voltage of the node N1 lowers and reaches  $V_{cc_{off}}$  as shown in FIG. 6(a), and the DC output voltage  $V_{out}$  also lowers as shown in FIG. 6(d). However, when the capacitor 33 is charged by the starting resistor 31 and the voltage of the node N1 reaches  $V_{cc_{on2}}$ , the RS-FF 49 is set, and the power supply to the oscillation circuit 60 is resumed (see FIG. 6(b)). Due to this, the NMOS 34 resumes repeatedly being on and off, and thus the DC output voltage  $V_{out}$  rises.

A time period  $T2$  required for the voltage of the node N1 to change from  $V_{cc_{off}}$  to

$V_{cc_{on2}}$  is shorter than a time period  $T1$  required for the voltage of the node  $N1$  to change from  $V_{cc_{off}}$  to  $V_{cc_{on1}}$ . Therefore, when compared to a configuration where the NMOS 34 resumes being turned on and off when the voltage of the node  $N1$  reaches  $V_{cc_{on1}}$ , the DC output voltage  $V_{out}$  falls less frequently, and fluctuation of the DC output voltage  $V_{out}$  in the standby mode is reduced more.

### Second Embodiment

The DC power source apparatus according to the first embodiment is an example of an isolation type DC power source apparatus employing a transformer. However, the present invention can be applied to a non-isolation type DC power source apparatus. Non-isolation type DC power source apparatuses include several types such as a step-up converter type, a step-down converter type, a polarity inverting type, etc. With any type, if it has a normal mode and a standby mode where the output voltage becomes lower than the normal mode, it is possible to reduce fluctuation of the DC output voltage in the standby mode by applying the present invention. The following will explain a second embodiment of the present invention where the present invention is applied to a non-isolation type DC power source apparatus.

FIG. 7 is a diagram showing a structure of a DC power source apparatus according to the second embodiment of the present invention. In FIG. 7, elements same as those in FIG. 1 are denoted by the same reference numerals.

The step-up converter type DC power source apparatus shown in FIG. 7 comprises a coil 111 for storing energy instead of the transformer 32, an auxiliary coil 112 which is inductively coupled to the coil 111, and a diode 113. Further, this DC power source apparatus comprises a starting resistor 31, an NMOS 34, a capacitor 33, a starting circuit 40, an oscillation circuit 60, a determination circuit 80, an output circuit 91, and a detection circuit 100 which are substantially the same as those of the first embodiment.

One end of the coil 111 is connected to the input terminal  $IN1$ , and the other end of the coil 111 is connected to the drain of the NMOS 34, and to anode of the diode 91a of the

output circuit 91. One end of the auxiliary coil 112 is connected to the input terminal IN2. The other end of the auxiliary coil 112 is connected to an anode of the diode 113, and a cathode of the diode 113 is connected to the node N1. The output terminal OUT2 is connected to the input terminal IN2. Other connections are the same as those in FIG. 1.

5 In the DC power source apparatus shown in FIG. 7, energy is stored in the coil 111 when the NMOS 34 is on, and a current derived from this energy and a power source current flow through the diode 91a when the NMOS 34 is off. As a result, a DC output voltage  $V_{out}$  which is higher than an input voltage is generated. A current caused in the auxiliary coil 112 is rectified by the diode 113, and supplied to the node N1. The capacitor 33 is  
10 charged with this current. The capacitor 33, the starting circuit 40, the oscillation circuit 60, the determination circuit 80, the output circuit 91, and the detection circuit 100 work substantially in the same way as that explained in FIG. 1.

In the DC power source apparatus shown in FIG. 7 too, in the normal mode, the DC output voltage  $V_{out}$  is controlled to be a constant value. On the other hand, in a case where  
15 a standby signal SB is input, the voltage of the node N1 lowers to  $V_{cc_{off}}$ , and the DC output voltage  $V_{out}$  lowers. Then, when the voltage of the node N1 reaches  $V_{cc_{on2}}$ , power supply to the oscillation circuit 60 is resumed, thereby to resume repetition of turning on and off of the NMOS 34. Therefore, the DC output voltage  $V_{out}$  rises.

Further, in the DC power source apparatus shown in FIG. 7 too, a time period T2  
20 required for the voltage of the node N1 to change from  $V_{cc_{off}}$  to  $V_{cc_{on2}}$  is shorter than a time period T1 required for the voltage of the node N1 to change from  $V_{cc_{off}}$  to  $V_{cc_{on1}}$ . Accordingly, when compared to a configuration where the NMOS 34 resumes being turned on and off when the voltage of the node N1 reaches  $V_{cc_{on1}}$ , the DC output voltage  $V_{out}$  falls less frequently, and fluctuation of the DC output voltage  $V_{out}$  in the standby mode is  
25 reduced more.

The present invention is not limited to the above described embodiments, but can be variously modified. As examples of modification, the followings are possible.

(1) The DC power source apparatus according to the first and second embodiments comprises the detection circuit 100, in order to accurately keep the DC output voltage  $V_{out}$  constant. However, the present invention can be applied to a DC power source apparatus which does not have a structure for feed-backing information representing a DC output  
5 voltage.

(2) In the DC power source apparatus according to the first and second embodiments, the determination circuit 80 determines whether or not a standby signal SB is input, using a feedback signal FB. However, the standby signal SB may be directly input to the AND gate 47 of the starting circuit 40. With this structure, the determination circuit 80  
10 can be omitted.

As described above, according to the present invention, it is possible to reduce fluctuation of the DC output voltage even in the standby mode.

Various embodiments and changes may be made thereunto without departing from the broad spirit and scope of the invention. The above-described embodiments are intended to  
15 illustrate the present invention, not to limit the scope of the present invention. The scope of the present invention is shown by the attached claims rather than the embodiments.

Various modifications made within the meaning of an equivalent of the claims of the invention and within the claims are to be regarded to be in the scope of the present invention.

This patent application claims the Paris Convention Priority based on Japanese Patent  
20 Application No. 2002-4490 filed with the Japan Patent Office on January 11, 2002, the complete disclosure of which is hereby incorporated by reference.

#### Industrial Applicability

The present invention relates to a power source apparatus such as a DC-DC converter,  
25 which is applied to electrical/electronic equipment.

## CLAIMS

1. A power source apparatus comprising: a conversion circuit (40, 60, 34, 32, 91,  
5 100, 80) which performs conversion of an input voltage into an output voltage different from  
the input voltage; and a driving power source (33) which is charged with the input voltage to  
drive said conversion circuit (40, 60, 34, 32, 91, 100, 80), wherein:

in a case where a standby signal is not supplied from outside, said conversion circuit  
(40, 60, 34, 32, 91, 100, 80) performs the conversion so that the output voltage may be  
10 stabilized at a predetermined first value;

in a case where the standby signal is supplied from outside, said conversion circuit (40,  
60, 34, 32, 91, 100, 80) performs the conversion so that the output voltage may be stabilized  
at equal to or lower than a predetermined second value which is lower than the  
predetermined first value, by controlling the output voltage to rise when a voltage of said  
15 driving power source (33) rises to a first charging voltage, and by controlling the output  
voltage to lower when the voltage of said driving power source (33) lowers to a second  
charging voltage; and

a difference between the first and second charging voltages in the case where the  
standby signal is supplied is smaller than a difference between the first and second charging  
20 voltages in a case where the standby signal is not supplied.

2. The power source apparatus according to claim 1,

wherein: said conversion circuit (40, 60, 34, 32, 91, 100, 80) includes

a transformer (32a, 32b) which has a primary winding and a secondary winding  
which are inductively coupled to each other,

25 a switching circuit (40, 60, 34, 80) which applies the input voltage to said  
primary winding intermittently,

a rectifier circuit (91) which rectifies a voltage which is induced in said

secondary winding, and

a detection circuit (100) which detects that the standby signal is supplied;

said switching circuit (40, 60, 34, 80) determines whether or not said detection circuit (100) detects the standby signal;

5 in a case where determining that the standby signal is not detected, said switching circuit (40, 60, 34, 80) sets timings of intermittence of the input voltage so that the output voltage may be stabilized at the predetermined first value; and

in a case where determining that the standby signal is detected, said switching circuit (40, 60, 34, 80) stabilizes the output voltage at equal to or lower than the predetermined  
10 second value, by starting applying the input voltage intermittently when the voltage of said driving power source (33) rises to the first charging voltage, and by stopping applying the input voltage when the voltage of said driving power source (33) lowers to the second charging voltage.

3. The power source apparatus according to claim 2,

15 wherein: said conversion circuit (40, 60, 34, 32, 91, 100, 80) further includes a feedback circuit (104, 105) which generates a feedback signal representing the output voltage; and

said switching circuit (40, 60, 34, 80) sets timings of intermittence of the input voltage so that the output voltage may be stabilized at the predetermined first value, based on the  
20 feedback signal, in a case where it determines that said detection circuit (100) does not detect the standby signal.

4. The power source apparatus according to claim 3,

wherein: said detection circuit (100) controls said feedback circuit (104, 105) so that a value represented by the feedback signal may be a predetermined value, in response to that  
25 the standby signal is supplied; and

said switching circuit (40, 60, 34, 80) determines whether or not said detection circuit (100) detects the standby signal, based on the value represented by the feedback signal.



5. The power source apparatus according to claim 4,

wherein: in a case where said detection circuit (100) detects that the standby signal is supplied, said switching circuit (40, 60, 34, 80) sets timings of intermittence of the input voltage based on the value represented by the feedback signal so that the output voltage may be stabilized at equal to or lower than the predetermined second value, by starting intermittent application of the input voltage when the voltage of said driving power source (33) rises to the first charging voltage, and by stopping the application of the input voltage when the voltage of said driving power source (33) lowers to the second charging voltage.

6. The power source apparatus according to claim 2, further comprising:

10 a tertiary winding (32c) which is inductively coupled to said primary winding; and an auxiliary rectifier circuit (35) which rectifies a voltage induced in said tertiary winding (32c),

wherein said driving power source (33) is also charged with a voltage obtained by rectification by said auxiliary rectifier circuit (35).

15 7. The power source apparatus according to claim 1,

wherein: said conversion circuit (40, 60, 34, 32, 91, 100, 80) includes

a coil (111),

a switching circuit (40, 60, 34, 80) which applies the input voltage to said coil (111) intermittently,

20 a rectifier circuit (91) which rectifies a voltage induced in said coil (111), and

a detection circuit (100) which detects that the standby signal is supplied;

said switching circuit (40, 60, 34, 80) determines whether or not said detection circuit (100) detects the standby signal;

in a case where determining that the standby signal is not detected, said switching circuit (40, 60, 34, 80) sets timings of intermittence of the input voltage so that the output voltage may be stabilized at the predetermined first value; and

in a case where determining that the standby signal is detected, said switching circuit

(40, 60, 34, 80) stabilizes the output voltage at equal to or lower than the predetermined second value, by starting applying the input voltage intermittently when the voltage of said driving power source (33) rises to the first charging voltage, and by stopping applying the input voltage when the voltage of said driving power source (33) lowers to the second  
5 charging voltage.

8. The power source apparatus according to claim 7,

wherein: said conversion circuit (40, 60, 34, 32, 91, 100, 80) further includes a feedback circuit (104, 105) which generates a feedback signal representing the output voltage; and

10 said switching circuit (40, 60, 34, 80) sets timings of intermittence of the input voltage so that the output voltage may be stabilized at the predetermined first value, based on the feedback signal, in a case where it determines that said detection circuit (100) does not detect the standby signal.

9. The power source apparatus according to claim 8,

15 wherein: said detection circuit (100) controls said feedback circuit (104, 105) so that a value represented by the feedback signal may be a predetermined value, in response to that the standby signal is supplied; and

said switching circuit (40, 60, 34, 80) determines whether or not said detection circuit (100) detects the standby signal, based on the value represented by the feedback signal.

20 10. The power source apparatus according to claim 9,

wherein: in a case where said detection circuit (100) detects that the standby signal is supplied, said switching circuit (40, 60, 34, 80) sets timings of intermittence of the input voltage based on the value represented by the feedback signal so that the output voltage may be stabilized at equal to or lower than the predetermined second value, by starting  
25 intermittent application of the input voltage when the voltage of said driving power source (33) rises to the first charging voltage, and by stopping the application of the input voltage when the voltage of said driving power source (33) lowers to the second charging voltage.

11. The power source apparatus according to claim 7, further comprising:  
an auxiliary coil (112) which is inductively coupled to said coil (111); and  
an auxiliary rectifier circuit (113) which rectifies a voltage induced in said auxiliary  
coil (112),

5 wherein said driving power source (33) is also charged with a voltage obtained by  
rectification by said auxiliary rectifier circuit (113).

12. The power source apparatus according to claim 1,  
wherein the second charging voltage in the case where the standby signal is supplied  
and the second charging voltage in the case where the standby signal is not supplied are  
10 substantially equal to each other.

1/9


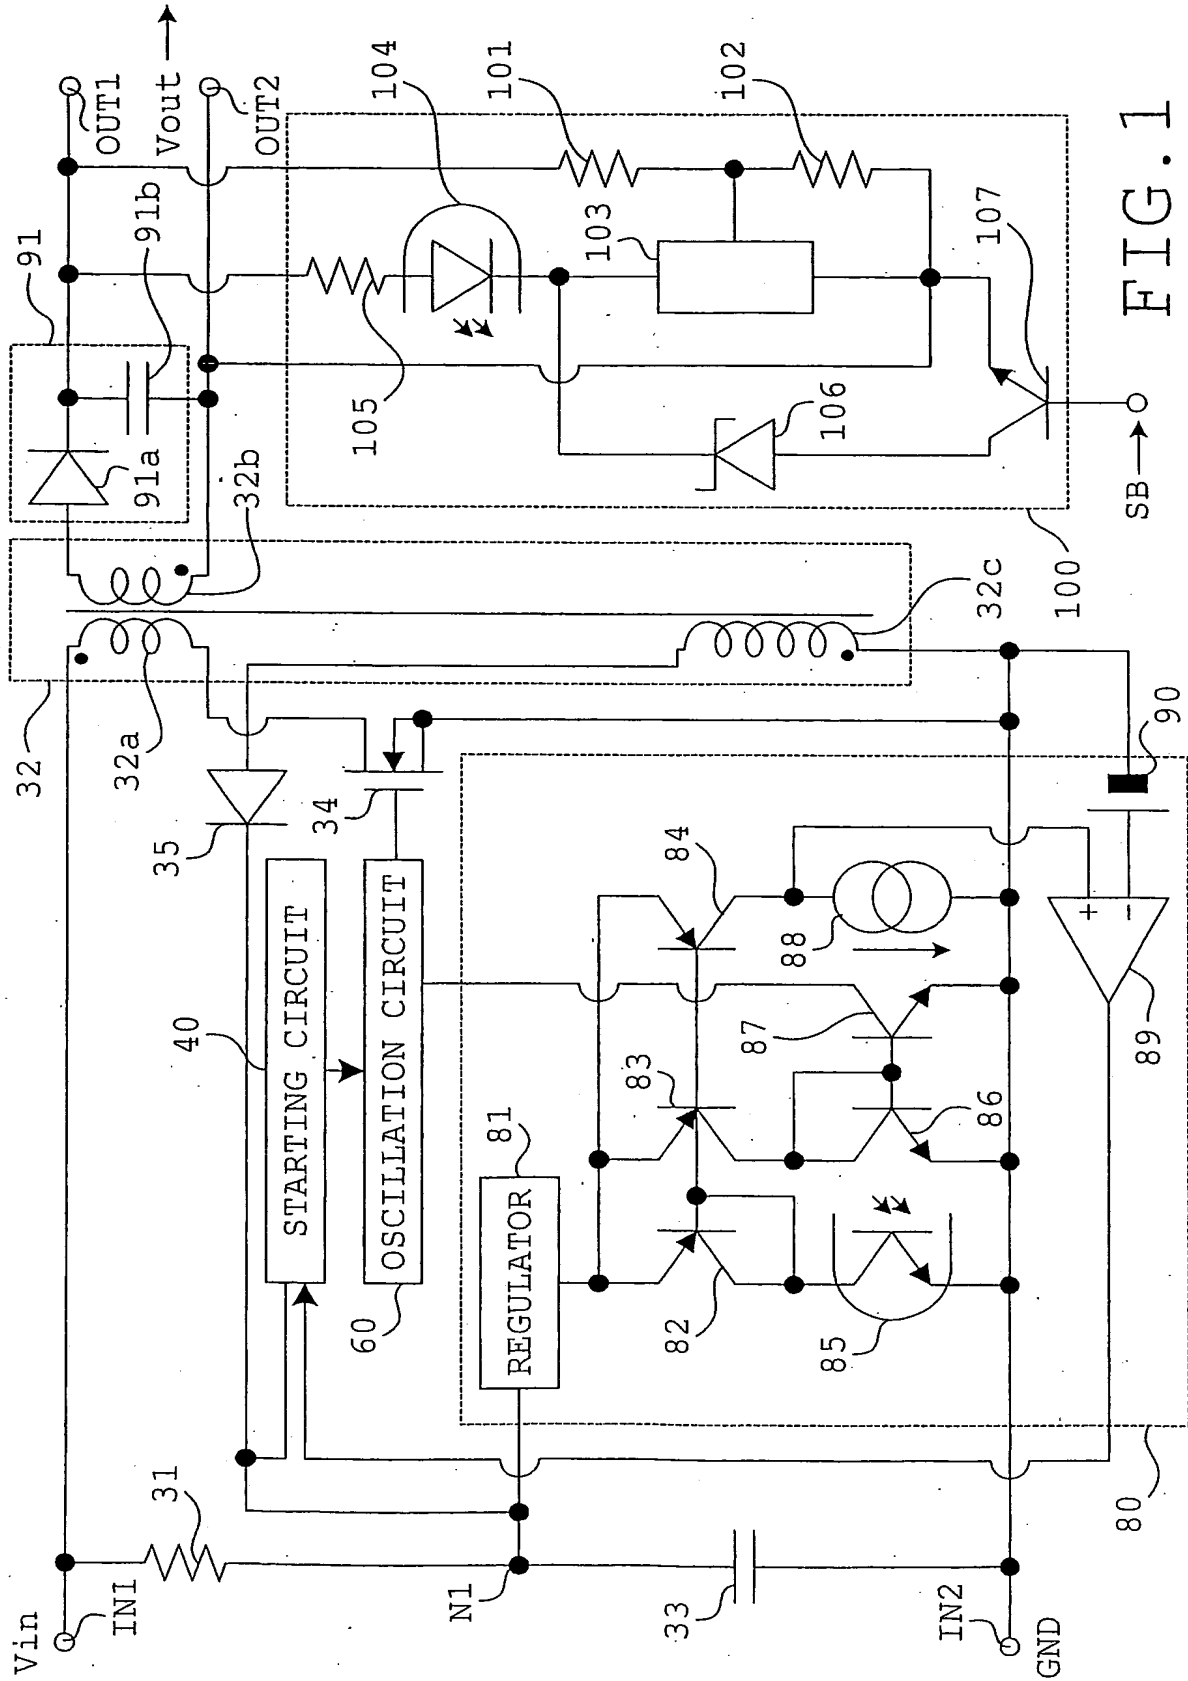


FIG. 1

2/9

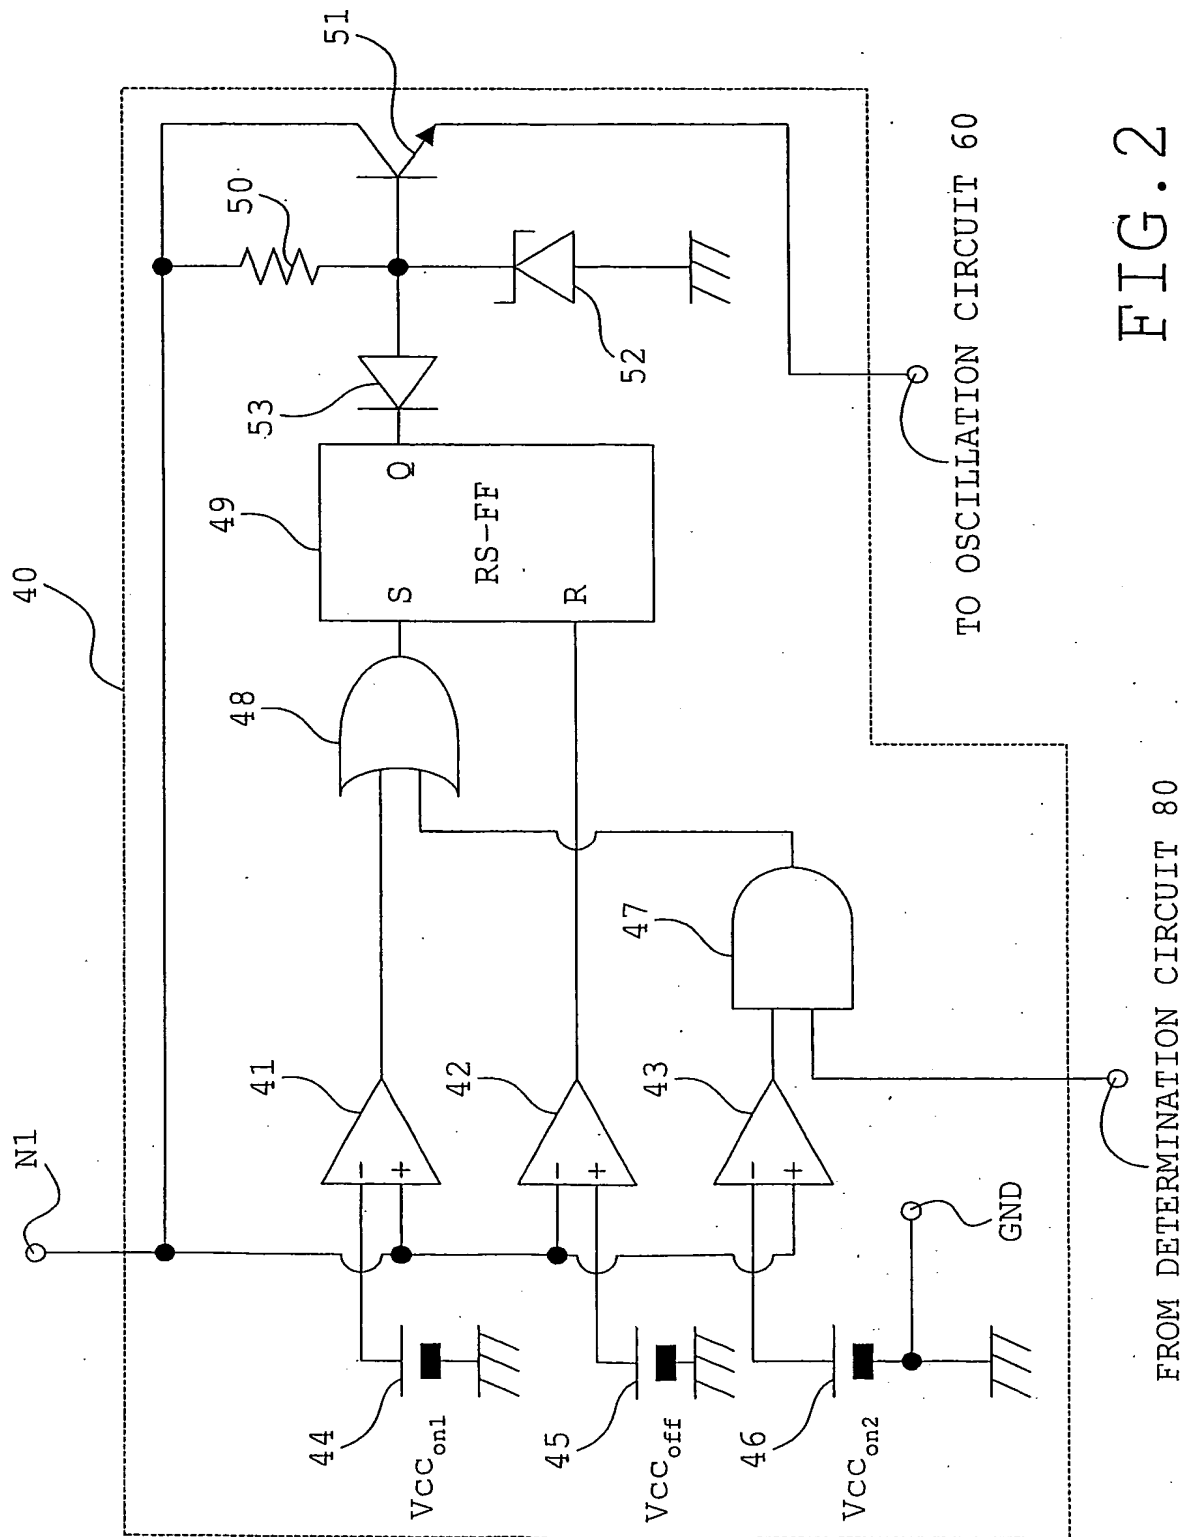

3/9



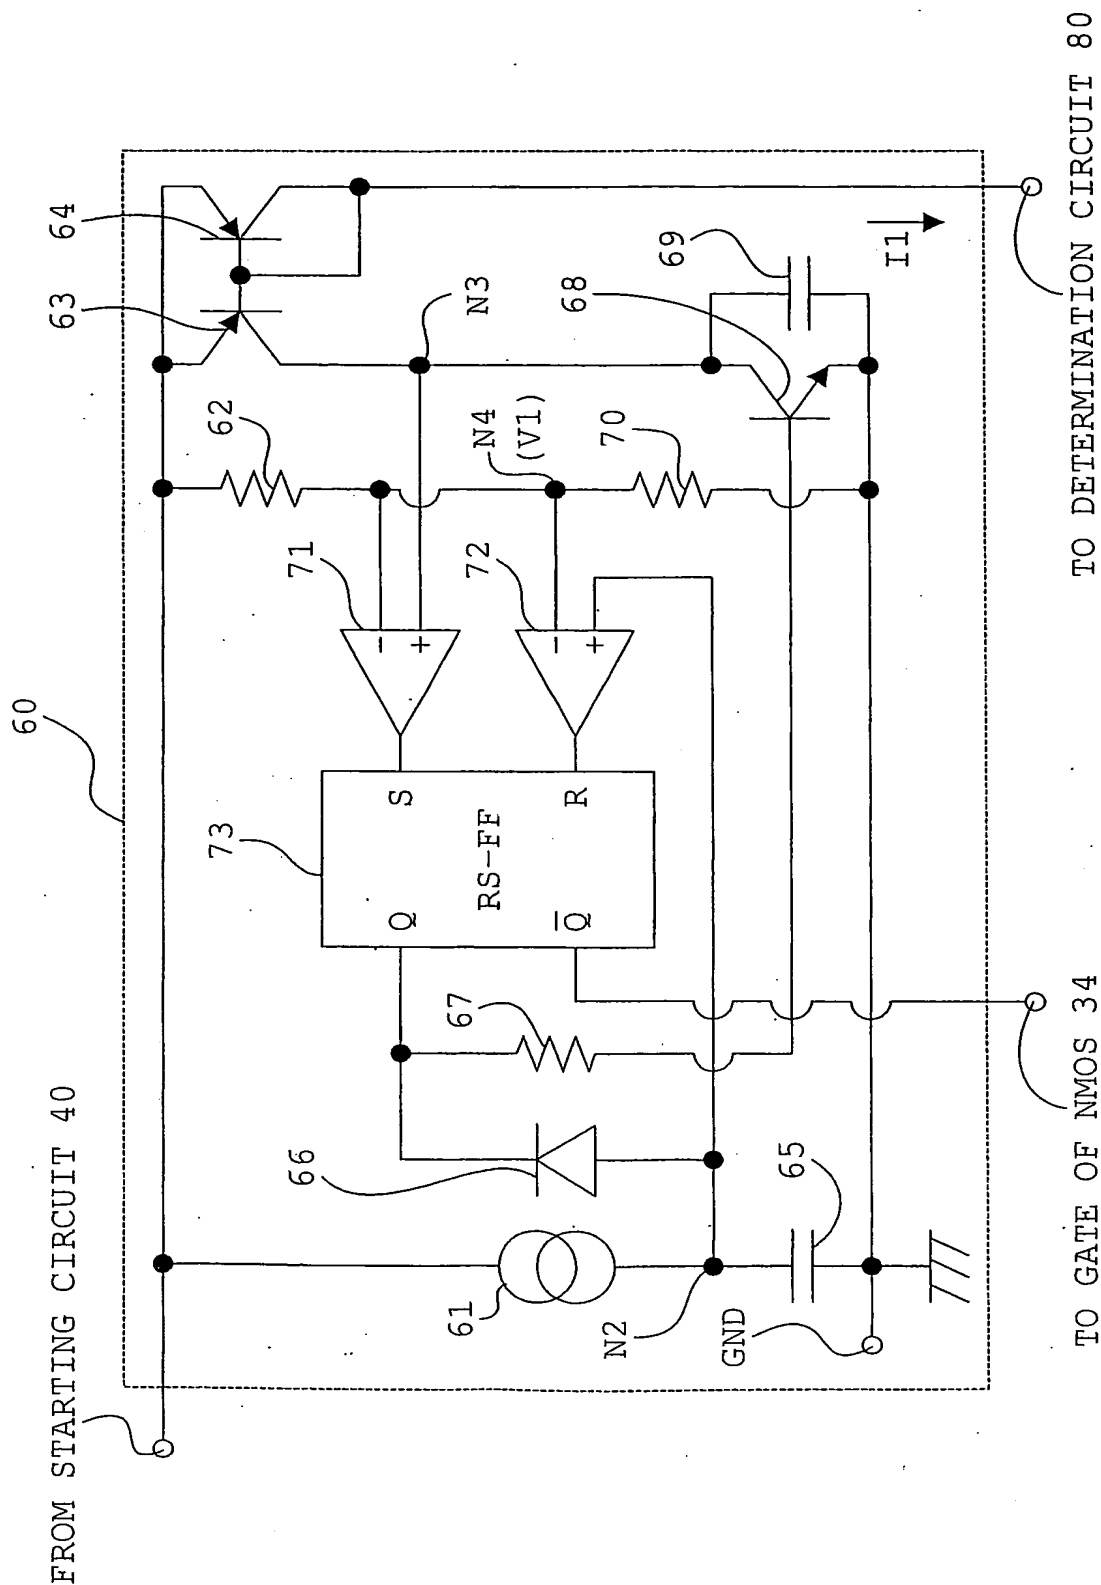


FIG. 3

(a) VOLTAGE OF NODE N1

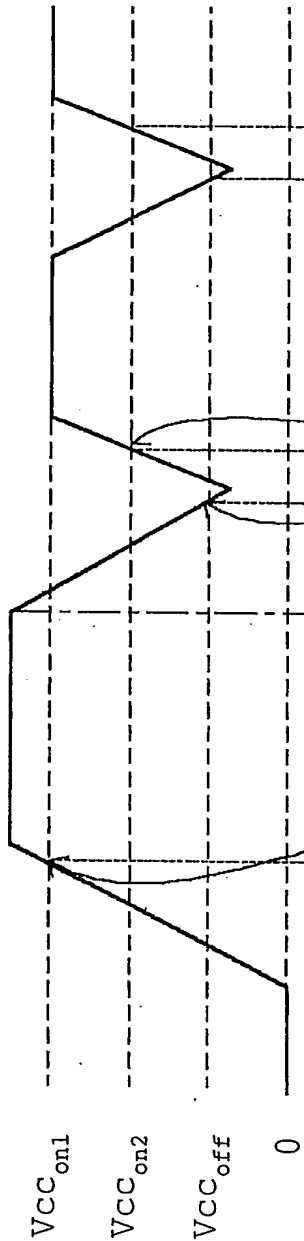

(b) OUTPUT VOLTAGE OF TRANSISTOR 51



(c) DETERMINATION SIGNAL FROM DETERMINATION CIRCUIT 80

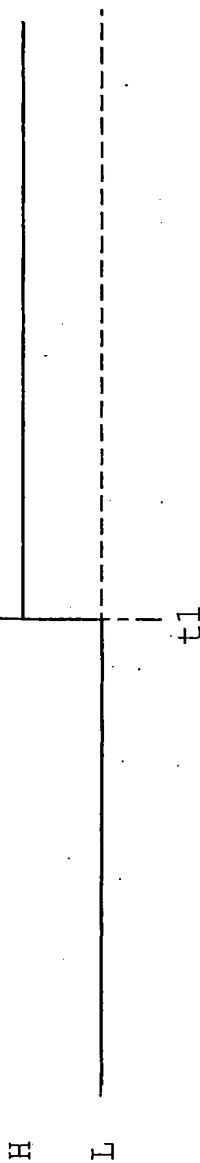


FIG. 4

5/9

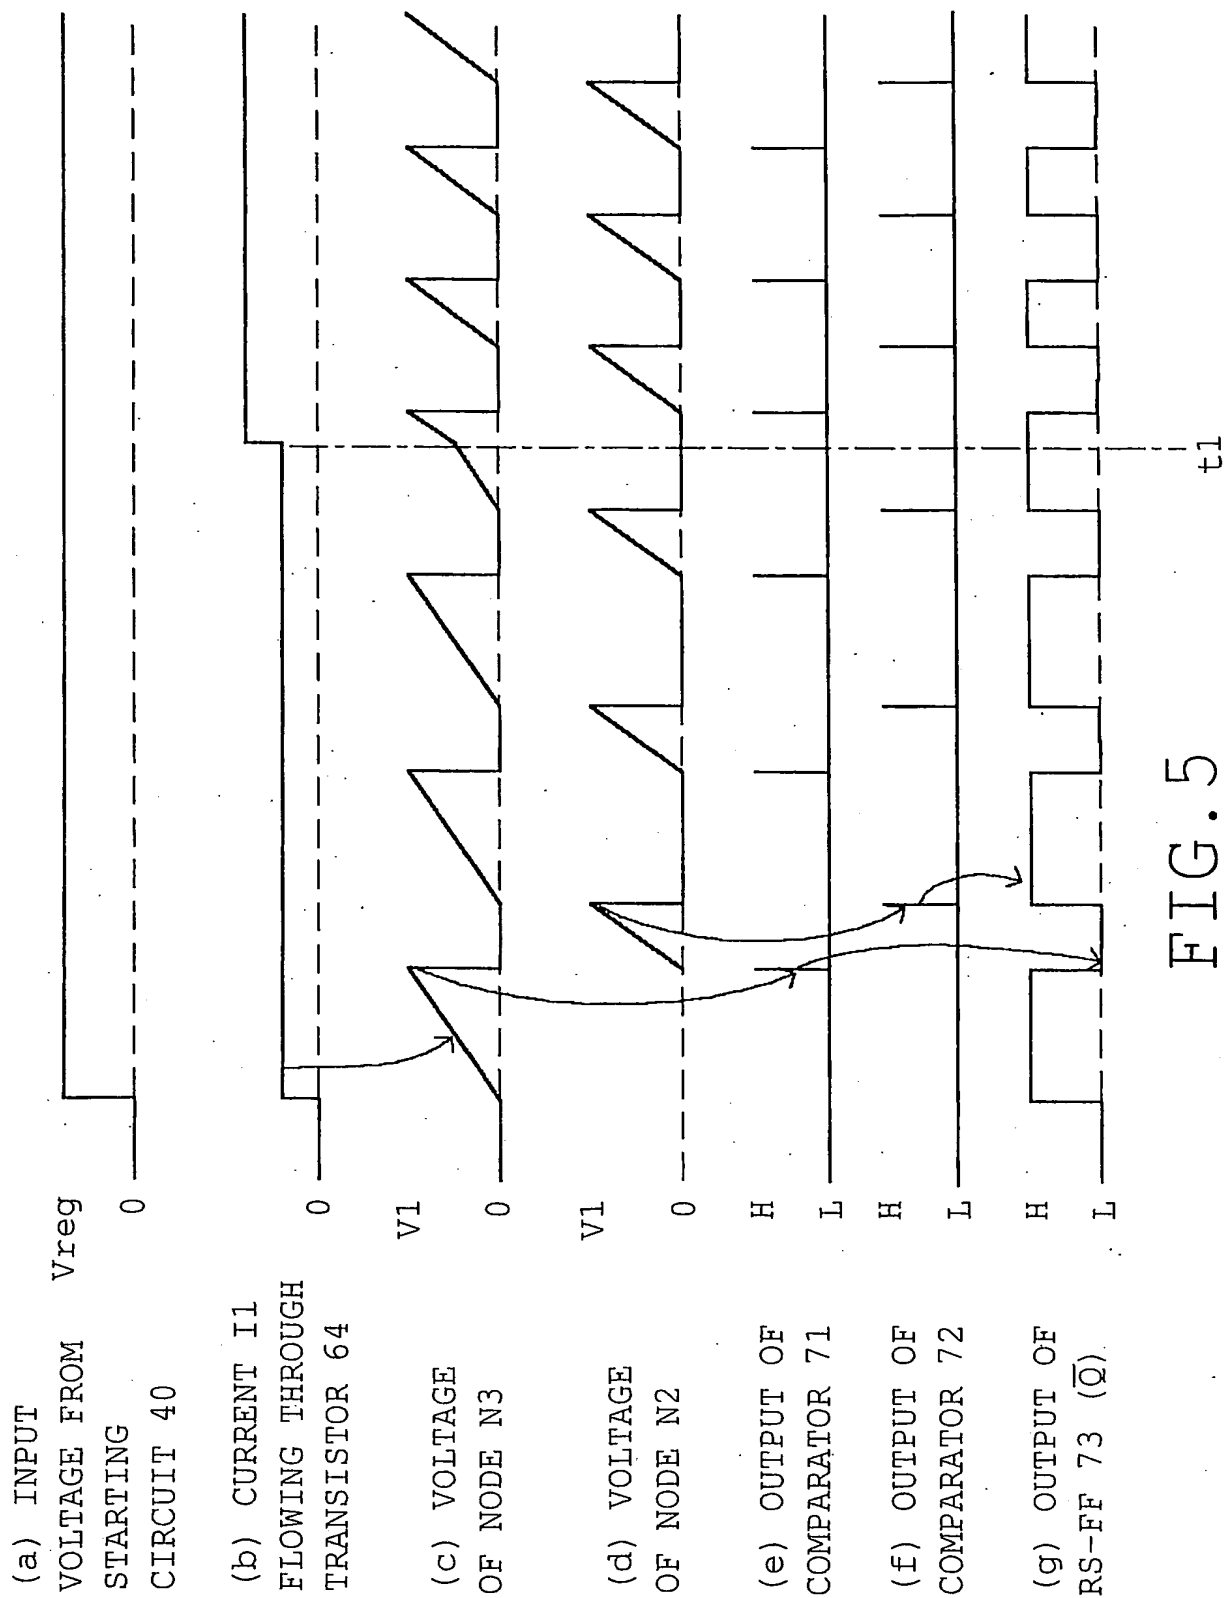


FIG. 5



6/9

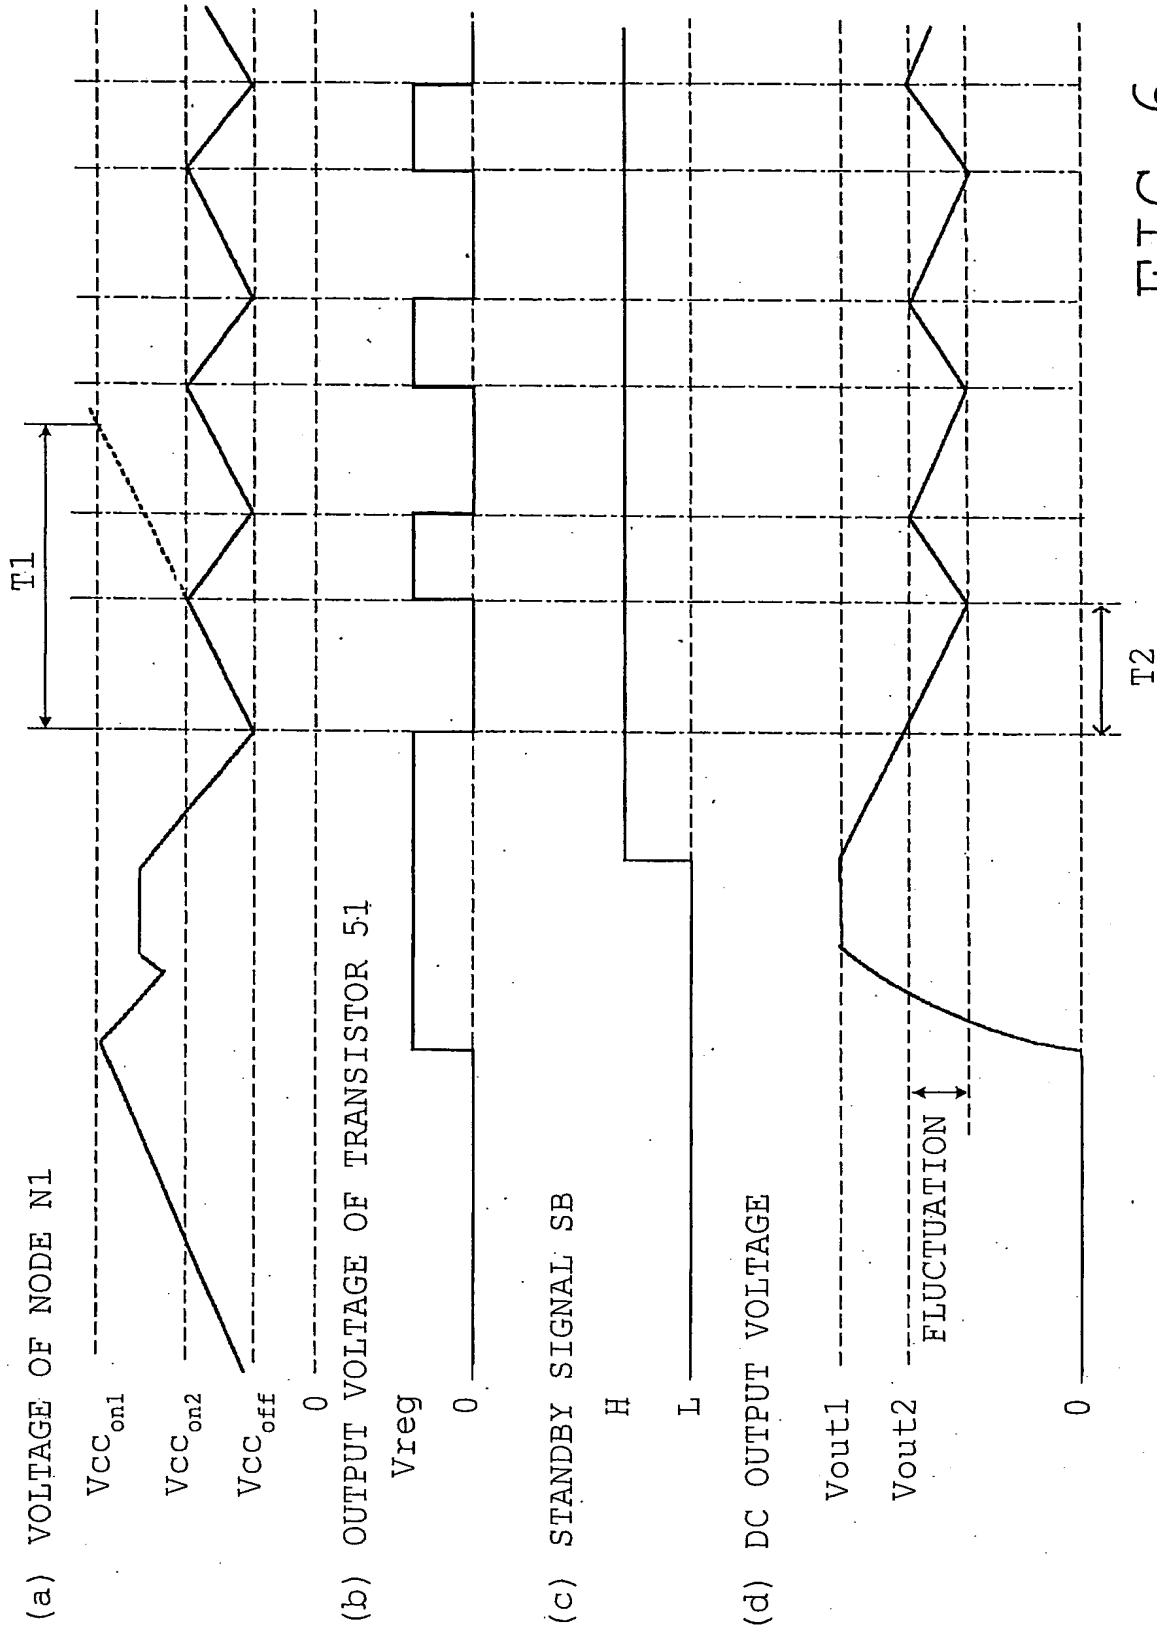


FIG. 6

7/9

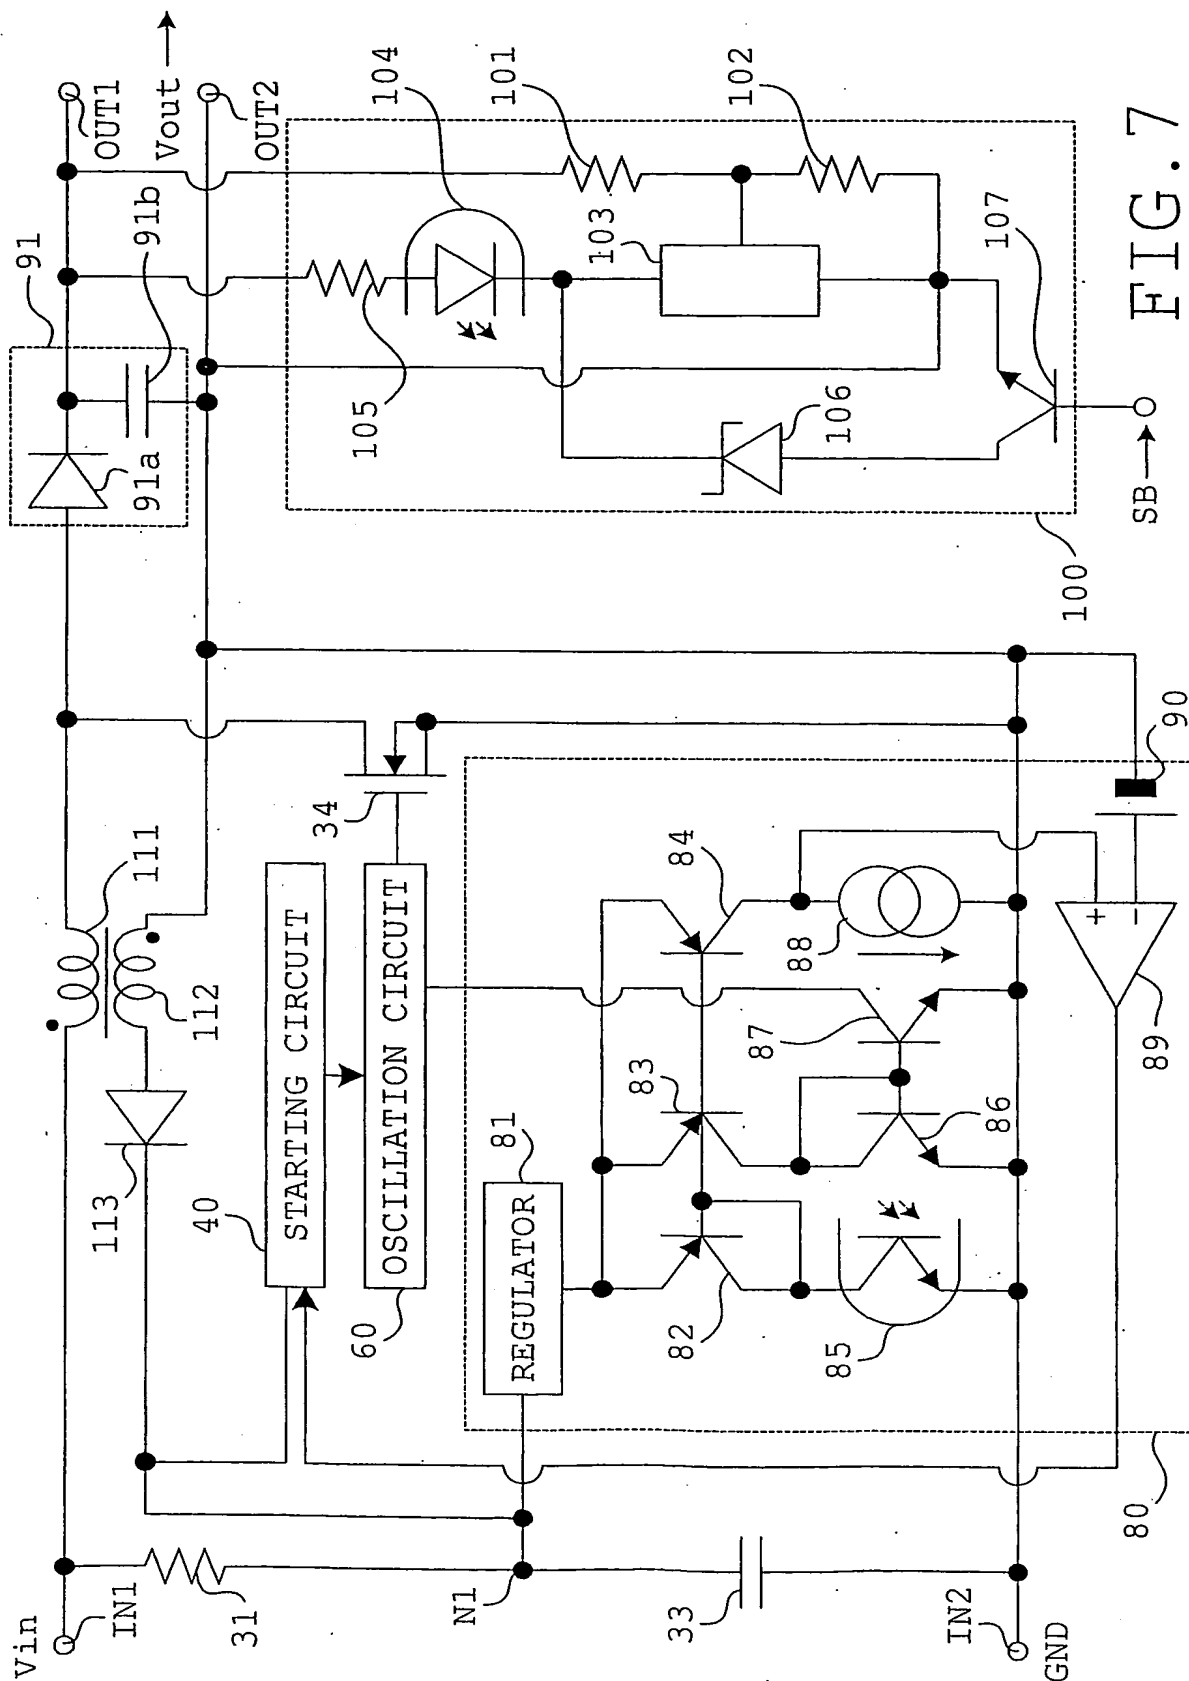


FIG. 7

8 / 9

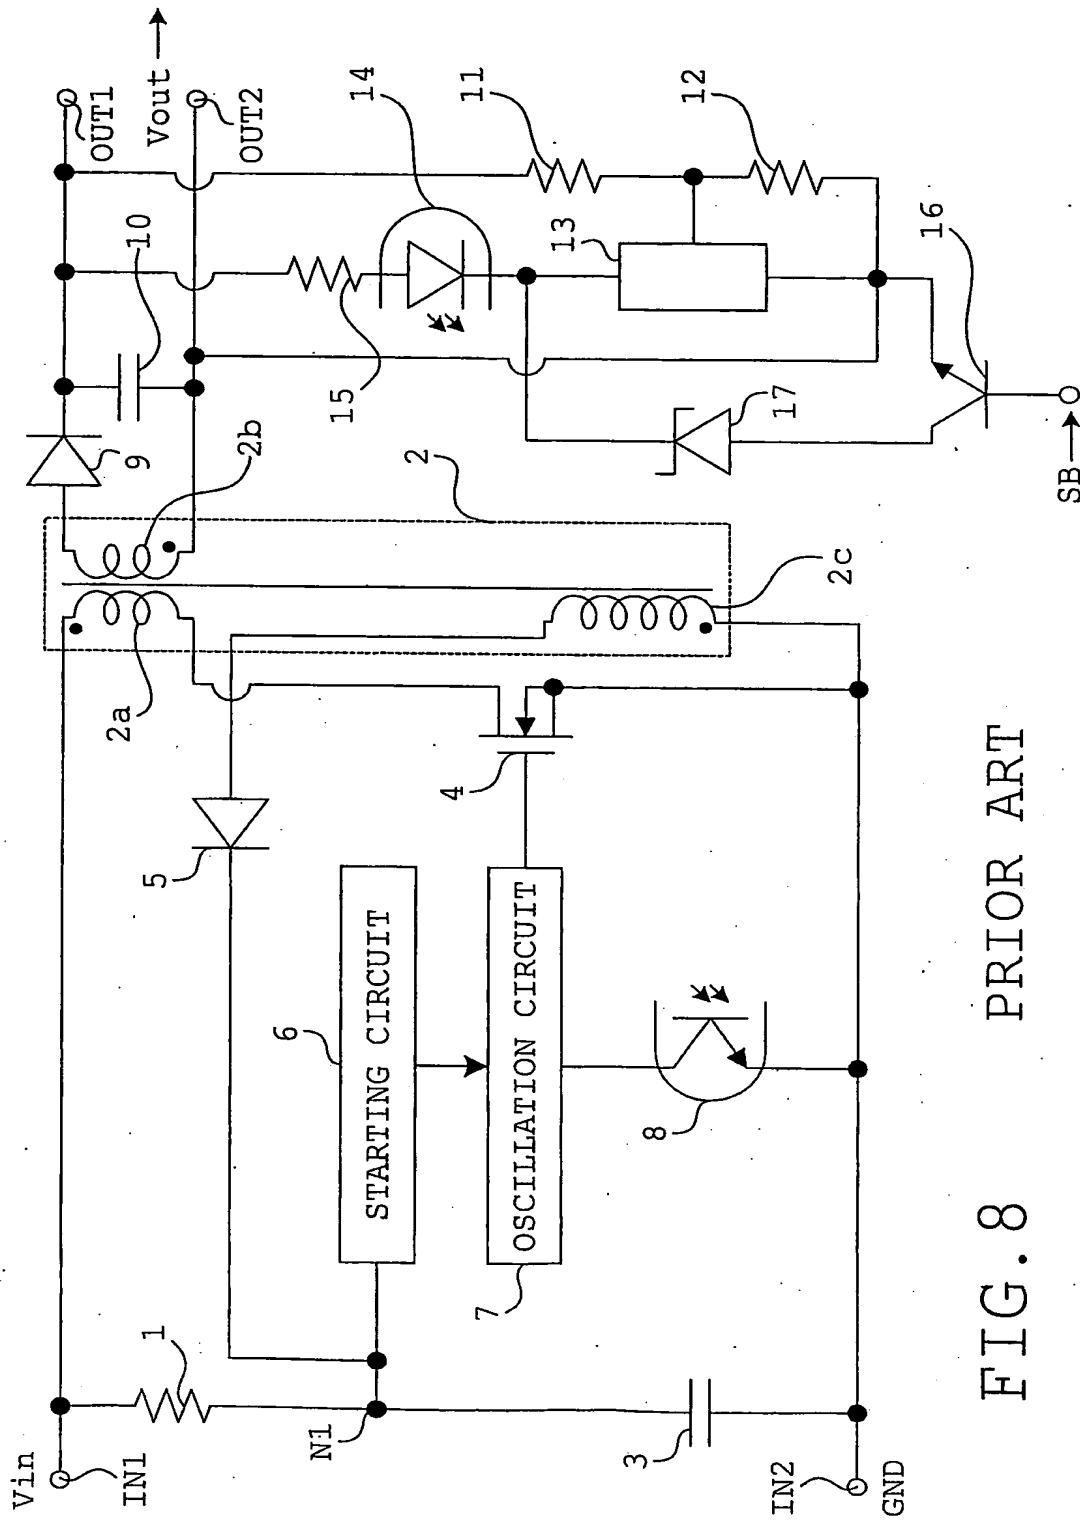


FIG. 8 PRIOR ART

9/9

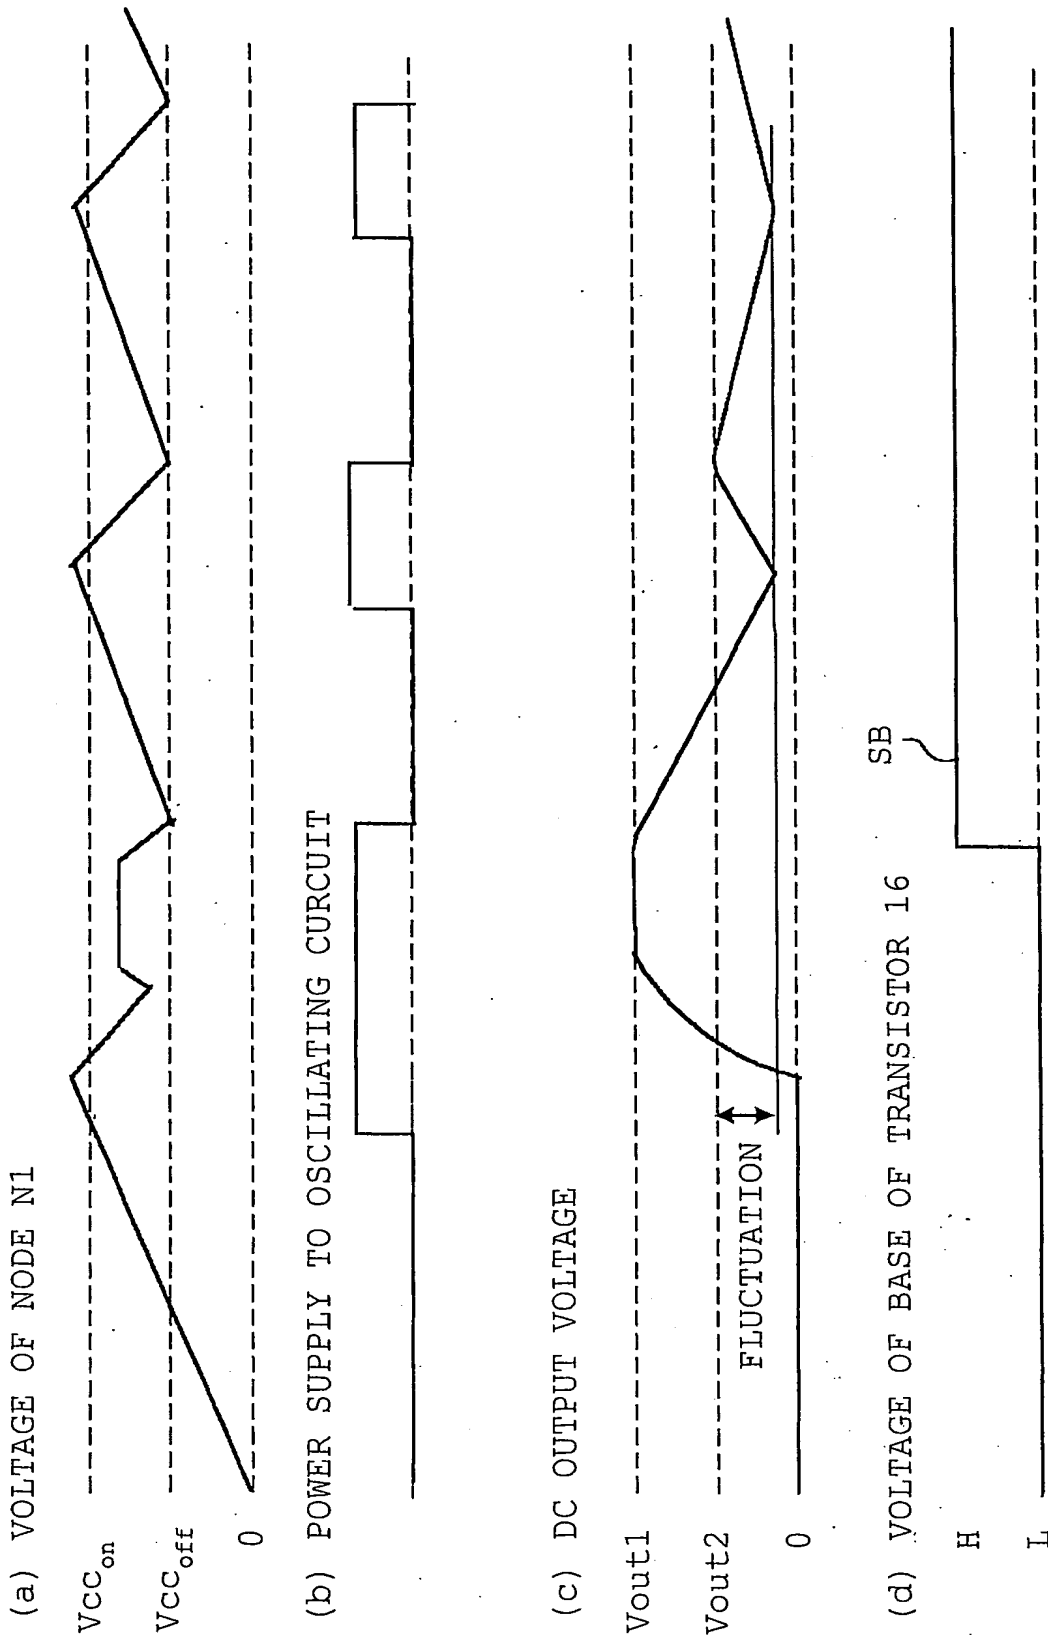


FIG. 9 PRIOR ART

## INTERNATIONAL SEARCH REPORT

 Internatl Application No  
 PCT/ 3/00161

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 H02M3/335 H02M3/156		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 7 H02M		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 689 407 A (DE BONDT GUY L P ET AL) 18 November 1997 (1997-11-18) abstract column 8 -column 10 column 15, line 1 - line 36 figures 1,,3A-3D,,8A,,8B ---	1-12
X	US 6 252 783 B1 (HUH DONG-YOUNG ET AL) 26 June 2001 (2001-06-26) abstract column 3 -column 5 column 7, line 11 - line 40 figures 3,5 ---	1,12
A	US 5 179 508 A (WALTERS MICHAEL M ET AL) 12 January 1993 (1993-01-12) abstract figure 1 --- -/--	1,7-11
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family		
Date of the actual completion of the international search 9 October 2003		Date of mailing of the international search report 16/10/2003
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Marannino, E.

## INTERNATIONAL SEARCH REPORT

Internat Application No  
PCT/ 3/00161

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 993 105 A (ST MICROELECTRONICS SRL) 12 April 2000 (2000-04-12) column 6, line 8 - line 26 -----	1-12

## INTERNATIONAL SEARCH REPORT

In ..... patent family members

Internat

Application No

PCT/.....03/00161

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5689407	A	18-11-1997	CN 1154766 A , B DE 69609681 D1 DE 69609681 T2 EP 0765541 A1 WO 9631940 A1 JP 10501960 T	16-07-1997 14-09-2000 29-03-2001 02-04-1997 10-10-1996 17-02-1998
US 6252783	B1	26-06-2001	KR 2000065901 A DE 10016859 A1 JP 3333170 B2 JP 2000308343 A	15-11-2000 09-11-2000 07-10-2002 02-11-2000
US 5179508	A	12-01-1993	NONE	
EP 0993105	A	12-04-2000	EP 0993105 A1 DE 69810625 D1 JP 2000125561 A US 6118675 A	12-04-2000 13-02-2003 28-04-2000 12-09-2000

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 July 2003 (24.07.2003)

PCT

(10) International Publication Number  
**WO 2003/061106 A3**

(51) International Patent Classification<sup>7</sup>: H02M 3/335,  
3/156

Kitano 3-chome, Niiza-shi, Saitama 352-8666 (JP). UT-  
SUNO, Mizuki [JP/JP]; c/o Sanken Electric CO., LTD.,  
6-3, Kitano 3-chome, Niiza-shi, Saitama 352-8666 (JP).

(21) International Application Number:  
PCT/JP2003/000161

(74) Agent: KIMURA, Mitsuru; 2nd Floor, Kyohan Build-  
ing, 7, Kandanishiki-cho 2-chome, Chiyoda-ku, Tokyo  
101-0054 (JP).

(22) International Filing Date: 10 January 2003 (10.01.2003)

(25) Filing Language: English

(81) Designated States (*national*): CN, US.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE,  
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,  
IE, IT, LU, MC, NL, PT, SE, SI, SK, TR).

(30) Priority Data:  
2002-004490 11 January 2002 (11.01.2002) JP

Published:  
— with international search report

(71) Applicant (*for all designated States except US*): SANKEN  
ELECTRIC CO., LTD. [JP/JP]; 6-3, Kitano 3-chome, Ni-  
iza-shi, Saitama 352-8666 (JP).


(88) Date of publication of the international search report:  
15 January 2004

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): FURUKOSHI,  
Ryuichi [JP/JP]; c/o Sanken Electric CO., LTD., 6-3,

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(54) Title: POWER SOURCE APPARATUS

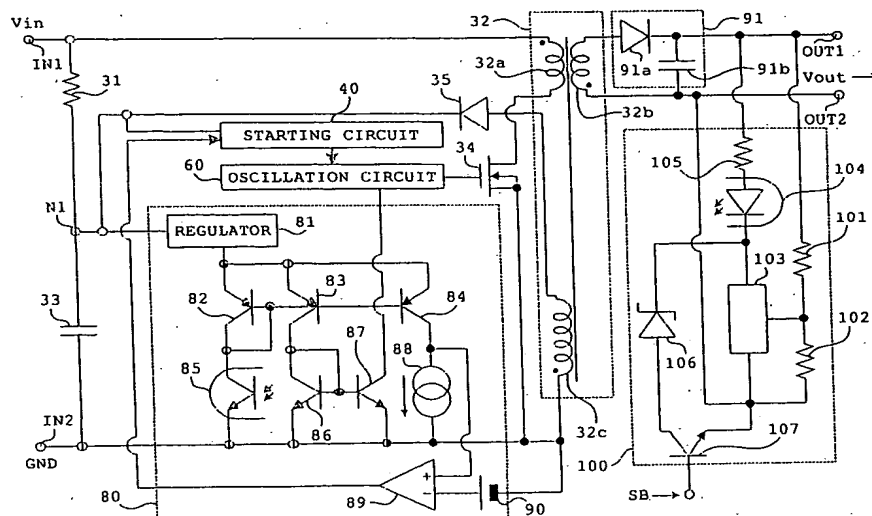

(57) Abstract: An input voltage is applied by an NMOS transistor (34) driven by an oscillation circuit (60) to a primary winding (32a) of a transformer (32) intermittently. A voltage induced in a secondary winding (32b) is rectified and smoothed by an output circuit (91) to be an output voltage. In a normal mode where no standby signal is supplied, the oscillation circuit (60) controls the NMOS transistor (34) so that the output voltage is stabilized at a predetermined first value. When a standby signal is supplied, a detection circuit (100) detects the standby signal and transmits the detection to a starting circuit (40). The starting circuit (40) starts the oscillation circuit (60) when a voltage of a capacitor (33) reaches an upper limit, and stops the oscillation circuit (60) when this voltage lowers below a lower limit. This upper limit is lower than an upper limit at which the starting circuit (40) starts the oscillation circuit (60) in the normal mode.

WO 2003/061106 A3



# INTERNATIONAL SEARCH REPORT

Internat Application No  
PCT 03/00161

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H02M3/335 H02M3/156

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H02M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 689 407 A (DE BONDT GUY L P ET AL) 18 November 1997 (1997-11-18) abstract column 8 -column 10 column 15, line 1 - line 36 figures 1,,3A-3D,,8A,,8B	1-12
X	US 6 252 783 B1 (HUH DONG-YOUNG ET AL) 26 June 2001 (2001-06-26) abstract column 3 -column 5 column 7, line 11 - line 40 figures 3,5	1,12
A	US 5 179 508 A (WALTERS MICHAEL M ET AL) 12 January 1993 (1993-01-12) abstract figure 1	1,7-11

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

9 October 2003

Date of mailing of the international search report

16/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Marannino, E.

## INTERNATIONAL SEARCH REPORT


International Application No.  
PCT/ 03/00161

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 993 105 A (ST MICROELECTRONICS SRL) 12 April 2000 (2000-04-12) column 6, line 8 - line 26 -----	1-12

# INTERNATIONAL SEARCH REPORT

In  on patent family members

Internat Application No  
PO  03/00161

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5689407	A	18-11-1997	CN 1154766 A ,B DE 69609681 D1 DE 69609681 T2 EP 0765541 A1 WO 9631940 A1 JP 10501960 T	16-07-1997 14-09-2000 29-03-2001 02-04-1997 10-10-1996 17-02-1998
US 6252783	B1	26-06-2001	KR 2000065901 A DE 10016859 A1 JP 3333170 B2 JP 2000308343 A	15-11-2000 09-11-2000 07-10-2002 02-11-2000
US 5179508	A	12-01-1993	NONE	
EP 0993105	A	12-04-2000	EP 0993105 A1 DE 69810625 D1 JP 2000125561 A US 6118675 A	12-04-2000 13-02-2003 28-04-2000 12-09-2000